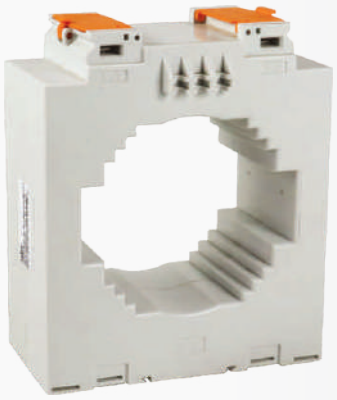

Features :

- Use with different bus bar
- Panel mount / DIN Rail mount (Optional accessory)
- Accuracy : Class 0.5

Certification : CE

Technical specifications

Input / Output specifications	
Rated primary rating	800A to 4000A
Rated secondary output	5A
Technical specifications	
Rated burden (VA)	1VA to 15VA
Class of accuracy	0.5 to 5
Thermal nominal continuous	120% of In Rated current (Icth)
Thermal short circuit current (Ith)	60 X In for 1 sec
Instrument security factor	FS <5
Insulation class	E (120°C max)
Max operating voltage (Um)	720V Maximum
Isolation test voltage	3kV AC 1 Minute
Nominal rated frequency	50Hz - 60Hz
Environmental specifications	
Ambient temperature	0°C to +50°C
Humidity	< 95% RH (Non - condensing)
Storage temperature	-5°C to +50°C
Mounting	
Mounting modes	Panel Mount / DIN Rail mount
Standard	
Applicable standard	IEC 61869-2

Ordering information

SPCT-140/100-800/5A-VA15-CL0.5-CE

Primary current	Accuracy
	0.5
800	15 VA
1000	15 VA
1200	15 VA
1250	15 VA
1500	15 VA
1600	15 VA

Primary current	Accuracy
	0.5
2000	15 VA
2500	15 VA
3000	15 VA
3500	15 VA
4000	15 VA

Dimensions (All are in mm)

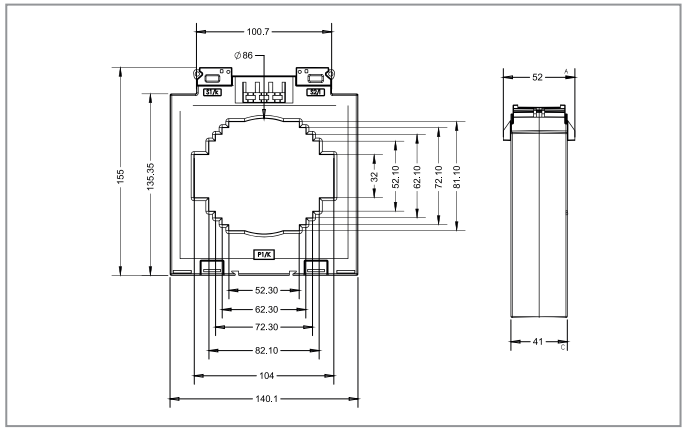

Accessories

Product code	Certification
AC-SPCT-DRAIL-01 (Pack of 10)	---